


BEELED

BEELED -

MODEL: 0603W2C-KHC-B

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within ROHS complaint version.



Descriptions

- The 0603 SMD LED is much smaller than lead frame type components, thus enable smaller
- board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications.etc

Usage Notes:

- Surge will damage the LED
- When using LED, it must use a protective resistor in series with DC current about 20mA

Applications

- Automotive: backlighting in dashboard and switch
- Telecommunication: indicator and backlighting in telephone and fax
- Flat backlight for LCD, switch and symbol
- General use


BEELED -

MODEL: 0603W2C-KHC-B

Device Selection Guide

LED Part No.	Chip		Lens Color
	Material	Emitted Color	
0603W2C-KHC-B	InGaN	White	Water clear
Color Temperature, K	7000	8000	

Package Dimensions

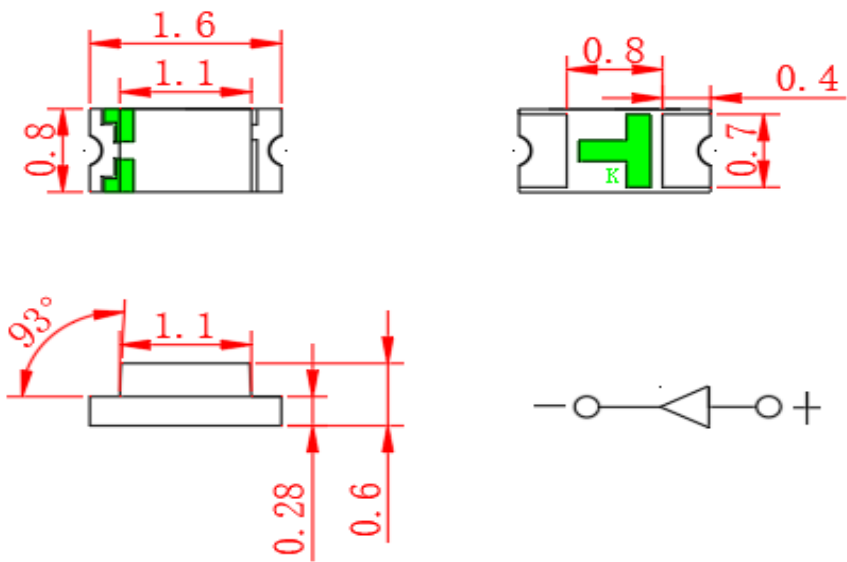

Notes:

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is ± 0.10 mm (.004") unless otherwise noted.



BEELED -

MODEL: 0603W2C-KHC-B

Absolute Maximum Rating ($T_a=25^{\circ}\text{C}$)

Parameter	Symbol	Absolute Maximum Rating	Unit
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	100	mA
Forward Current	I_{FM}	20	mA
Reverse Voltage	V_R	5	V
Power Dissipation	P_D	90	mW
Operating Temperature	T_{opr}	$-30\sim+85$	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	$-40\sim+90$	$^{\circ}\text{C}$
Soldering Temperature	T_{sol}	Reflow Soldering : 255°C for 10sec. Hand Soldering : 300°C for 3 sec.	

Electro-Optical Characteristics ($T_a=25^{\circ}\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I_v	400	---	600	mcd	$I_F=5\text{mA}$ (Note1)
Viewing Angle	$2\theta_{1/2}$	---	120	---	Deg	(Note 2)
Forward Voltage	V_F	2.7	---	2.9	V	$I_F=5\text{mA}$
Reverse Current	I_R	---	---	1	μA	$V_R=5\text{V}$

Chromaticity Coordinates Specifications for Bin Grading

COLOR RANKS	CIE X		CIE Y	
	Min.	Max	Min.	Max
	0.302	0.304	0.316	0.318

Note:







1. The C.I.E. 1931 chromaticity diagram (Tolerance ± 0.01).
2. Tolerance of Luminous Intensity $\pm 15\%$
3. The products are sensitive to static electricity and care must be fully taken when handling products.



BEELED -

Typical Electro-Optical Characteristics Curves

MODEL: 0603W2C-KHC-B

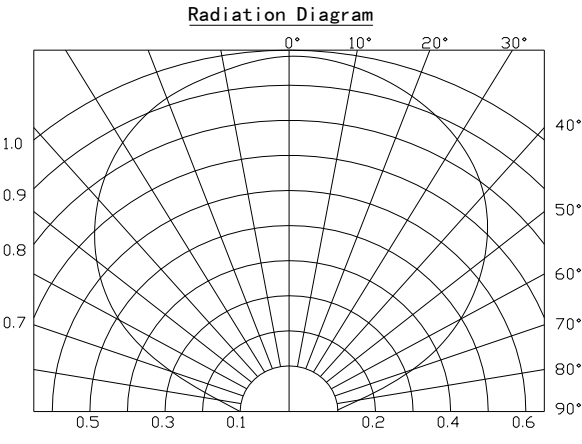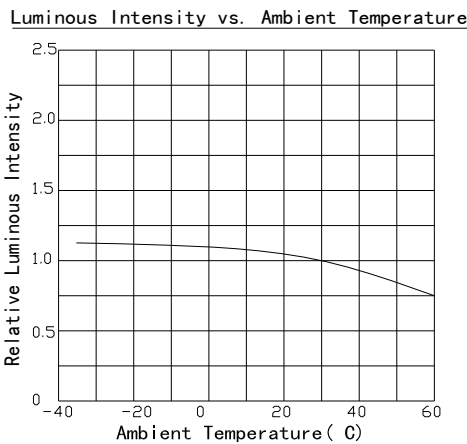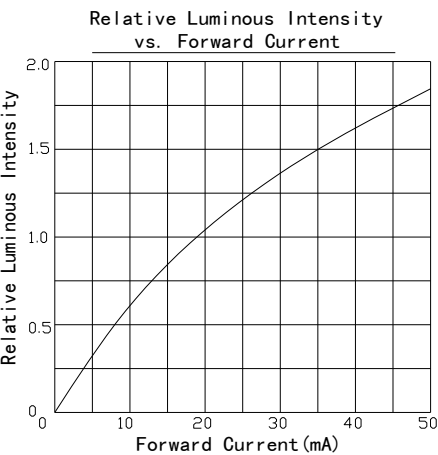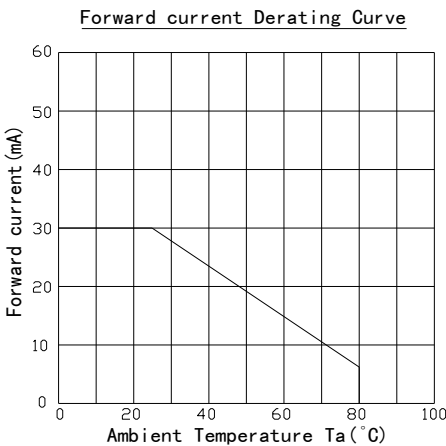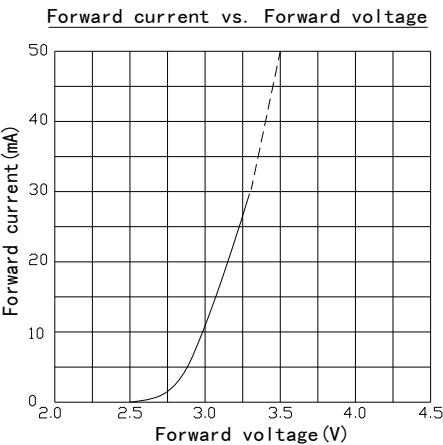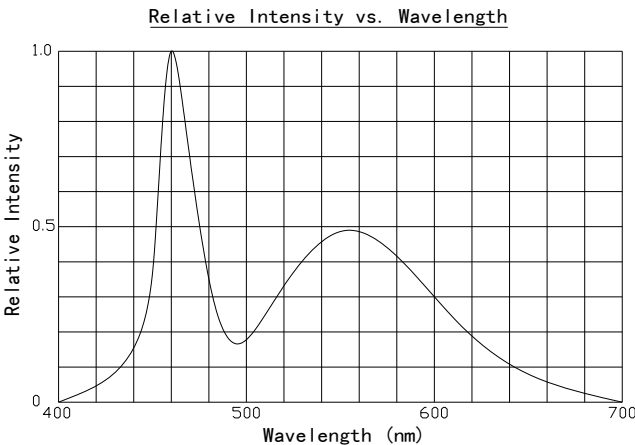

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big Current change(Burn out will happen)

2. Storage

Do not open moisture proof bag before the products are ready to use

Before opening the package, the LEDs should be kept at 30° C or less and 90 % RH or less

The LEDs should be used within a year

After opening the package, the LEDs should be kept at 30° C or less 70 % RH or less


The LEDs should be used within 168 hours(7 days)after opening the package

If the moisture absorbent material(silica gel)has faded away or the LEDs have exceeded the Storage time, baking treatment should be performed using the following conditions

Baking treatment: $60 \pm 5^{\circ}$ C for 24 hours

3. Soldering Condition

Pb-free solder temperature profile

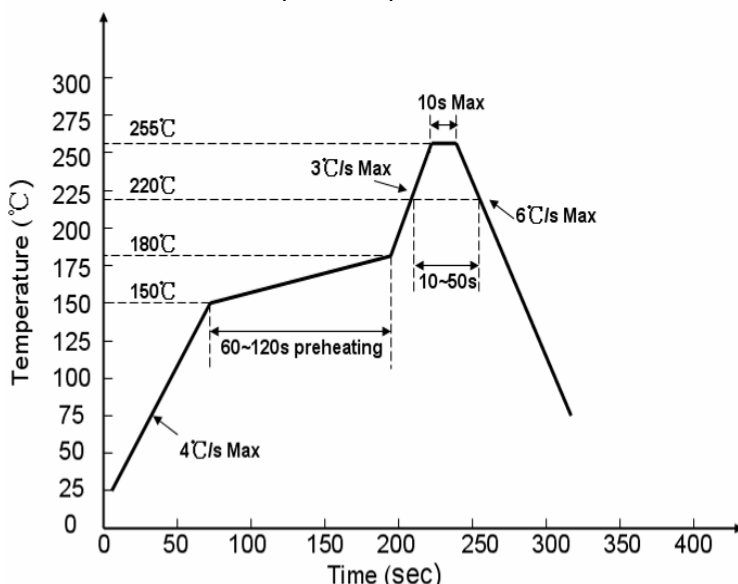

3.2 Reflow soldering should not be done more than two times

3.3 When soldering, do not put stress on the LEDs during heating

After soldering, do not warp the circuit board

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 280°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing

