


## BEELED -

---

MODEL: 10034Y1D-ESA-D

### Features

- High efficiency
- Low Power consumption
- General purpose leads
- Selected minimum intensities
- Available on tape and reel
- Pb free

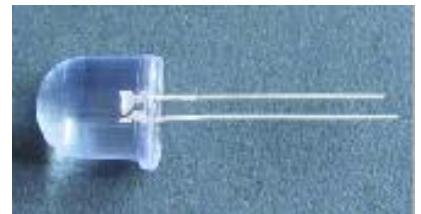

### Descriptions

- The series is specially designed for applications requiring higher brightness
- The LED lamps are available with different colors, intensities, epoxy colors, etc
- Superior performance in outdoor environment



### Usage Notes:

- The ultra bright LED is an electrostatic insensitive device, so static electricity and surge will damage the LED. It is required to wear a wrist-band when handling the LED. All device, equipment, machinery, desk and ground must be properly grounded
- When using LED, it must use a protective resistor in series with DC current about 20mA

### Applications

- Status indicators
- Commercial use
- Advertising Signs
- Back lighting


## BEELED -

**MODEL: 10034Y1D-ESA-D**

### Device Selection Guide

LED Part No.	Chip		Lens Color
	Material	Emitted Color	
10034Y1D-ESA-D	AlGaInP	Yellow	Diffuse

### Package Dimensions

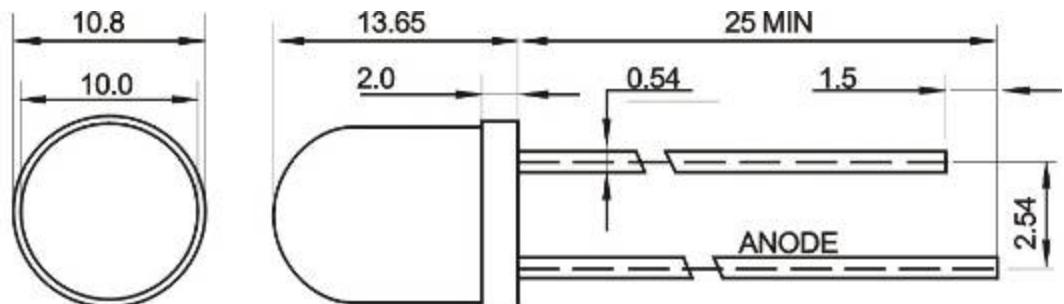

UNIT:mm

### Notes:

- Other dimensions are in millimeters, tolerance is 0.25mm except being specified.
- Protruded resin under flange is 1.5mm Max LED.
- Bare copper alloy is exposed at tie-bar portion after cutting.



## BEELED -

---

**MODEL: 10034Y1D-ESA-D**

### Absolute Maximum Rating ( $T_a=25^\circ C$ )

Parameter	Symbol	Absolute Maximum Rating		Unit
Forward Pulse Current	$I_{FPM}$	70		mA
Forward Current	$I_{FM}$	30		mA
Reverse Voltage	$V_R$	5		V
Power Dissipation	$P_D$	100		mW
Operating Temperature	$T_{opr}$	-40~+80		°C
Storage Temperature	$T_{stg}$	-40~+100		°C
Soldering Heat (5s)	$T_{sol}$	260		°C

### Electro-Optical Characteristics ( $T_a=25^\circ C$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	$I_v$	1000		2500	mcd	IF=20mA(Note 1)
Viewing Angle	$2\theta_{1/2}$	40		60	Deg	(Note 2)
Peak Emission Wavelength	$\lambda_p$	580	590	595	nm	IF=20mA
Spectral Line Half-Width	$\Delta\lambda$	15	20	25	nm	IF=20mA
Forward Voltage	$V_F$	1.9	---	2.5	V	IF=20mA
Reverse Current	$I_R$	---	---	10	μA	VR=5V


#### Note:

1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2.  $\theta_{1/2}$  is the off-axis angle at which the luminous intensity is half the axial luminous intensity.


**MODEL: 10034Y1D-ESA-D**

### Typical Electro-Optical Characteristics Curves


Relative Intensity VS. Wavelength

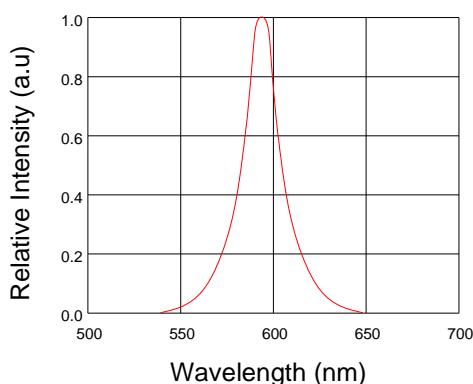


Forward Current VS. Forward Voltage

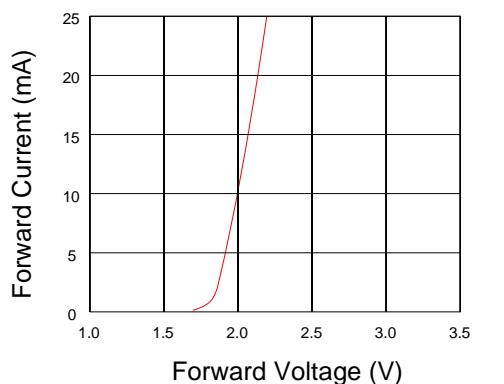


Relative Intensity VS. Ambient Temp

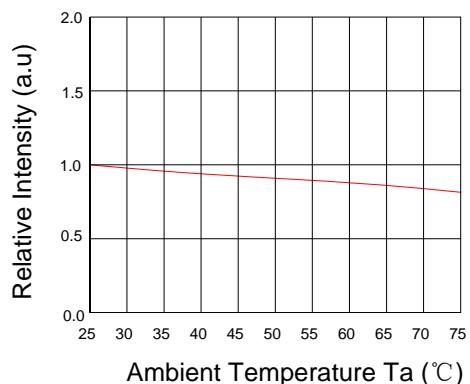


Forward Current VS. Relative Intensity

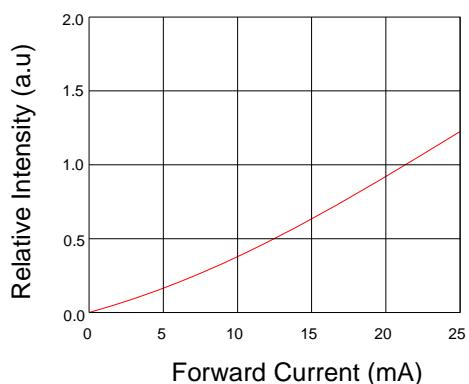

Forward Current VS. Ambient Temp.

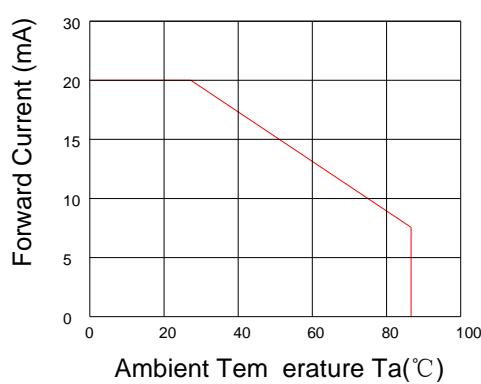

Radiation Characteristics

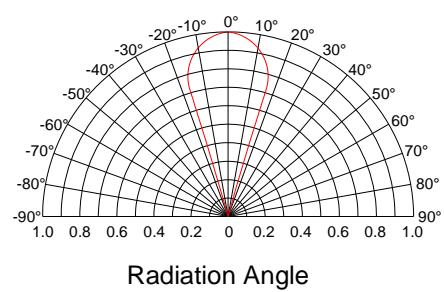



BEELED -

---

**MODEL: 10034Y1D-ESA-D**

1. . BEELED
2. ,  
BEELED ,
3. ,  
BEELED BEELED.