



СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ

MODEL: 1206UBN-001

产品类别(Product type): Chip LED		
产品名称(Product name):1206 Blue LED		
产品编号(Part No.): 1206UBN-001		
样品编号(Sample No.):		
承认书编号(Acknowledgement Numbers):201808240001		
签核 (Signatures)		
核准(Approved)	审核(Checked)	制定(Drawn)
王娟	周宏	阮国成

客户 (Customer)		
公司名称(Corporation):		
物料编码(Material No.):		
物料名称(Part No.):		
客户确认 (Customer Signatures)		

BEELED

СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ

MODEL: 1206UBN-001





Feature

- *Low power consumption
- *Long life-solid state reliability
- *Available on tape and reel
- *RoHS compliant

特征

- *低能耗
- *寿命长
- *易于装贴
- *符合 RoHS 要求

Package outline dimensions (产品外型尺寸)

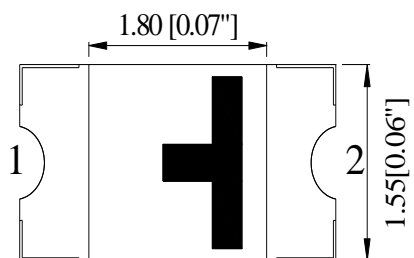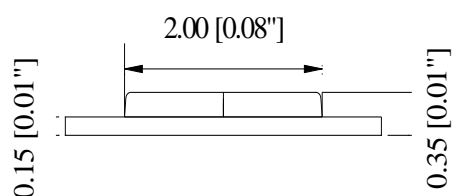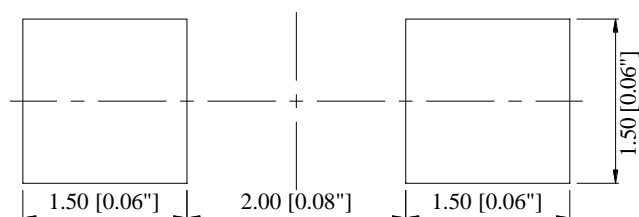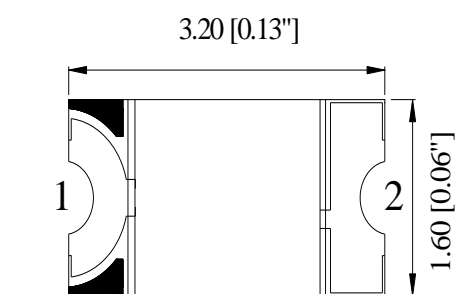

Note:



1. All dimensions are in millimeters (mm);
2. X.X is +/-0.1mm, X.XX is +/- 0.05mm unless otherwise noted;
3. The device has a single mounting surface, the device must be mounted according to the specifications.



СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ

MODEL: 1206UBN-001

Electrical characteristics data sheet

Selection Guide (选用指示)

Part No. (产品型号)	Emitted Color (发光颜色)	Resin color (胶体颜色)	Viewing Angle (发光角度) 20 _{1/2}
1206UBN-001	Blue	Water transparent	130°

Absolute Maximum Ratings at Ta=25℃ (极限参数)

Parameter (项目)	Symbol (符号)	Value (数值)	Unit (单位)
Power dissipation (功率消耗)	Pd	70	mW
DC Forward Current (正向电流)	If	30	mA
Peak Forward Current ⁽¹⁾ (峰值电流)	Ifp	70	mA
Reverse Voltage (反向电压)	Vr	5	V
Electro-Static-Discharge ⁽²⁾ (HBM)	ESD	1000	V
Operating Temperature (工作环境温度)	Topr	-25to+85	℃
Storage Temperature (储存温度)	Tstg	-40to+100	℃
Lead Solder Temperature (焊接温度)	Tsol	250 for 5sec	℃

Notes:

- 1/10 duty cycle, 0.1ms pulse width
- The products are sensitive to static electricity and must be carefully taken when handling products.

Electrical/Optical Characteristics Ta=25℃ (电子光学特性)

Parameter (参数)	Symbol (符号)	Condition (条件)	Value (数值)			Unit
			Min.	Typ.	Max.	
Forward voltage (正向电压)	VF	If=20mA	2.8	--	3.6	V
Luminous intensity (发光强度)	IV	If=20mA	100	160	--	mcd
Dominant wavelength (主波长)	WLD	If=20mA	464	--	474	nm
Peak wavelength (峰值波长)	WLP	If=20mA	---	463	---	nm
Reverse current(反向电流)	Ir	Vr=5V	---	---	10	μA

BEELED

СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ


MODEL: 1206UBN-001

Notes:


1. Forward voltage: $\pm 0.1V$
2. Dominant Wavelength: $\pm 1nm$
3. Luminous intensity: $\pm 10\%$

Typical Electro-Optical Characteristics Curves

FORWARD CURRENT VS. FORWARD VOLTAGE
电流与电压的关系图

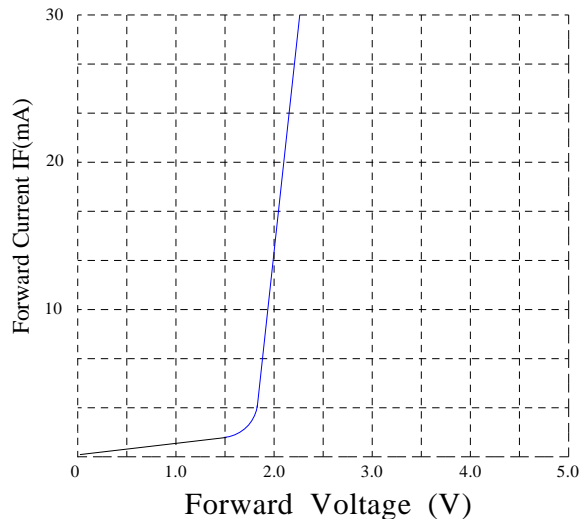

FORWARD CURRENT VS. LUMINOUS INTENSITY
电流与光强的关系图

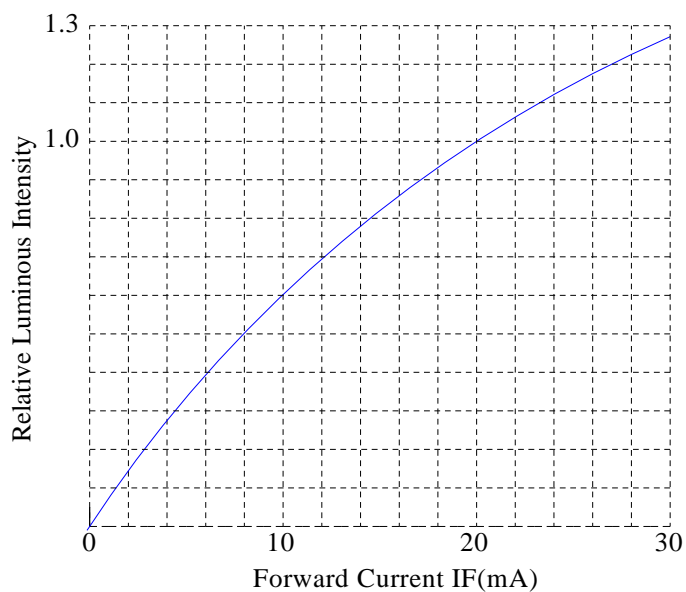



AMBIENT TEMPERA TURE VS.FORWARD CURRENT
电流与温度的关系图

RADIATION DIAGRAM
视角图



СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ

MODEL: **1206UBN-001**

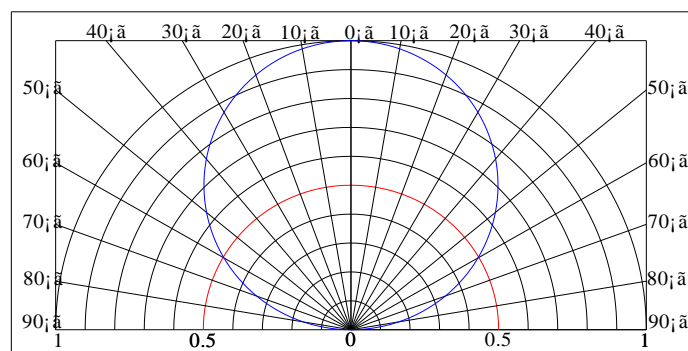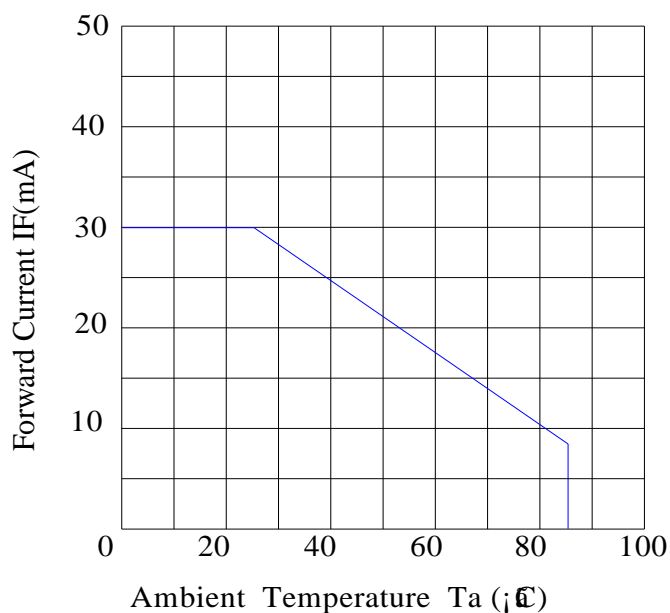

Bin Range of Technical Data Sheet

Voltage code (电压等级) (IF=20mA, Ta=25°C)			Luminous code(光强等级) (IF=20mA, Ta=25°C)		
Bin Code	Forward voltage (V)		Bin Code	Luminous Intensity (mcd)	
	min	max		min	max
16	2.8	3	L	100	125
17	3	3.2	M	125	160
18	3.2	3.4	N	160	200
19	3.4	3.6	O	200	250

Color Bin Limits



СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ

MODEL: 1206UBN-001

Color code (颜色等级) (IF=20mA, Ta=25℃)		
Bin Code	Dominant wavelength (nm)	
	min	max
B8	464	466
B9	466	468
B10	468	470
B11	470	472
B12	472	474

Notes:

- 1、Tolerance of forward voltage for each Bin limit is $\pm 0.1\text{V}$.
- 2、Tolerance of luminous intensity for each Bin limit is $\pm 10\%$.
- 3、Tolerance of wavelength for each Bin limit is $\pm 1\text{nm}$.

Reliability Test Items and Conditions(可靠性试验及条件)

1、Test items and result(测试项目及结果)

Test Item 测试项目	Ref. Standard 参考标准	Test Condition 测试条件	Note 记录	Number of Damaged 受损数量
Resistance to Soldering Heat (耐热测试)	JESD22-B106	Tsld=260℃,10sec	2 times	0/100
Temperature Cycle (冷热循环)	JESD22-A104	-40℃ 30min ↓↑ 5min 100℃ 30min	10 cycle	0/100
Thermal Shock (冷热冲击)	JESD22-A106	-40℃ 15min ↑↓ 100℃ 15min	10 cycle	0/100
Power temperature Cycling (高低温点亮循环测试)	JESD22-A105	On 5min -40℃>15min ↑↓↑↓<15min Off 5min 100℃>15min	10 cycle	0/100



СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ

MODEL: 1206UBN-001

High temperature Storage	JESD22-A103	Ta=100°C	1000 hrs	0/100
Low temperature Storage	JESD22-A119	Ta=-40°C	1000 hrs	0/100
Lift Test	JESD22-A108	Ta=25°C IF=20mA	1000 hrs	0/20
High Humidity Heat Lift Test	JESD22-A101	60°C RH=90 % IF=20mA	1000 hrs	0/20

2、Criteria for judging damage（受损失效判定标准）

Item	Symbol	Test Conditions	Criteria for Judgment	
			Min	Max
Forward voltage	VF	IF=20mA	--	U.S.L*)×1.1
Reverse current	IR	VR=5V	--	U.S.L*)×2.0
Luminous intensity	IV	IF=20mA	L.S.L**)×0.7	--


Notes:

U.S.L.: Upper Standard Level

L.S.L.: Lower Standard Level

Packaging Dimensions Specification

1、Carrier tape dimensions

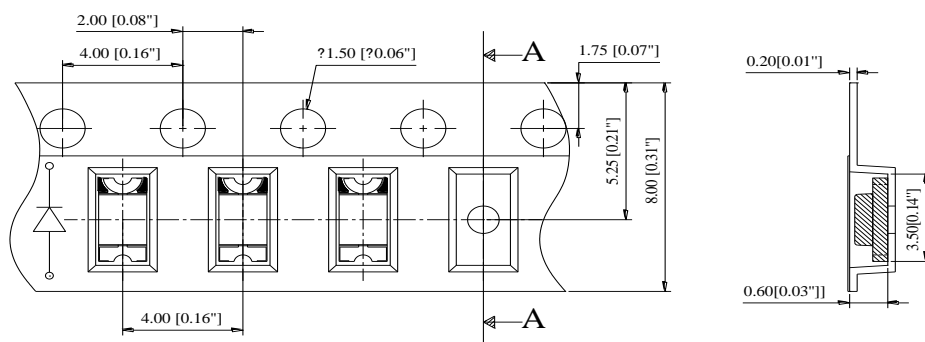

BEELED


СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ

MODEL: 1206UBN-001


Notes:

- 1) All dimensions are in millimeters
- 2) Tolerance is ± 0.15 unless otherwise noted
- 3) 3,000 pcs/Reel.

2、Details of carrier tape(编带细节)

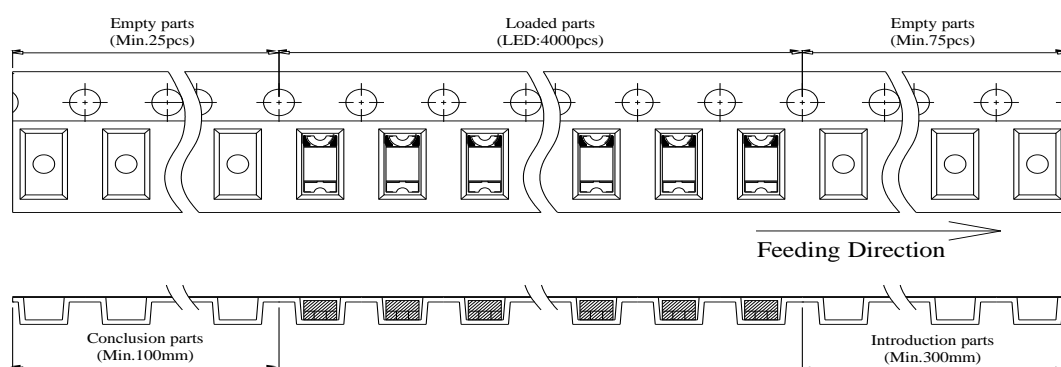

3、Reel dimensions(带盘尺寸)

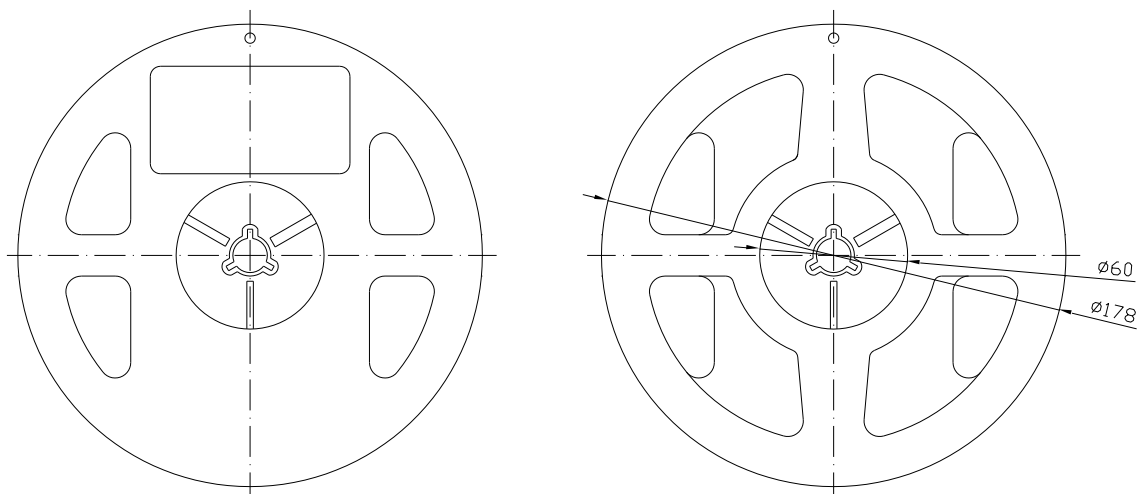


BEELED

СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ

MODEL: 1206UBN-001

Packaging Dimensions Specification

4、Moisture-Proof and anti-static electricity

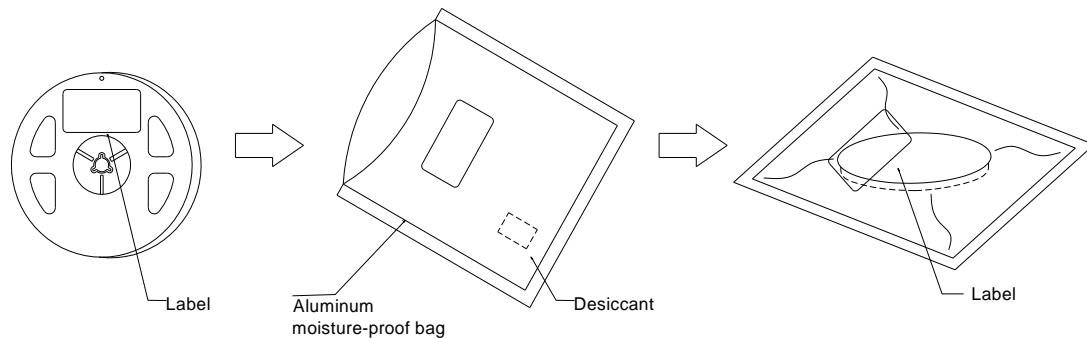

5、Label

BEELED	
Part No. :1206UBN-001	RoHS
VF (v) :*****	
IV (mcd) :*****	
WLD (nm) :*****	
Q' TY (pcs) :*****	
Lot No. :*****	Made In China

Label Explanation:

VF	: Forward voltage (正向电压)
IV	: Luminous intensity (发光强度)
WLD	: Dominant wavelength (主波长)
VF\IV\WLD used to represent the corresponding Bin code	

BEELED


СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ

MODEL: 1206UBN-001

Precautions

1、Requirements for application and reflow soldering:

Use the recommended curve in the under figure of Pb-free reflow soldering.

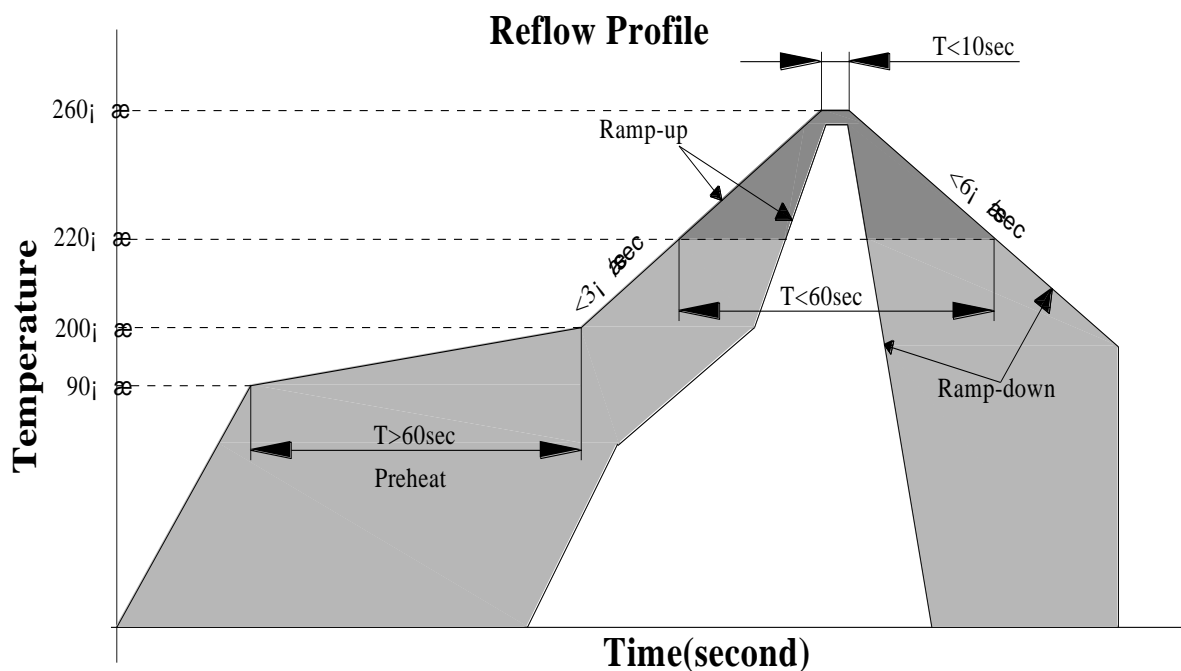

☆Notes for reflow soldering: 回流焊注意事项

- 1) No more than twice for reflow soldering.
- 2) To ensure the quality of our LEDs, please do not put pressure on the lens of LEDs.
- 3) Please choose the right nozzle to avoid the damage to products due to the pressure.
- 4) Please put on the antistatic hand loop during the use. The worktable should be with antistatic finish. The equipments must be contacted with ground

☆Handwork soldering 手工焊接:

- 1) During the soldering, the electronic soldering iron must be kept under the temperature of 350°C and the soldering time must not be beyond 3 seconds. No touch between the electronic soldering iron and colloid.
- 2) Handwork soldering is only allowed once. We won't take responsibility for more than that.
- 3) Avoid using sharp objects to compress products Colloidal Part directly.
- 4) Please put on the antistatic hand loop during the use. The worktable should be with antistatic finish. The equipments must be contacted with ground.



СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ

MODEL: 1206UBN-001

2、Storage

- ☆Moisture proof and anti-electrostatic package with moisture absorbent material is used to keep moisture to a minimum. Before opening the package, the product should be kept at 30℃ or less and humidity less than 60%RH ,and be used in six months.
- ☆After opening the package, the product should be stored at 30℃ or less and humidity less than 10%RH, and be soldered within 24 hours. It is recommended that the product be operated at the workshop condition of 30℃ or less and humidity less than 60%RH.
- ☆If the moisture absorbent material has faded away or the LEDs have exceeded the storage time, baking treatment should be performed based on the following condition (75±5) °C for 24 hours.

3、Static electricity

- ☆Static electricity or surge voltage damages the LEDs .Damaged LEDs will show some unusual characteristics such as the forward voltage coming lower, or the LEDs do not light at the low current .even not light.
- All devices, equipment and machinery must be properly grounded. At the same time ,it is recommended that wrist bands or anti-electrostatic gloves, anti-electrostatic containers be used when dealing with the LEDs .

4、Vulcanization

- ☆LED curing is due to sulfur being in bracket and the +1 price of silver in the chemical reaction generated Ag₂S in the process. It will lead to the capacity of reflecting of silver layer reducing, light color temperature drift and serious decline, Seriously affecting the performance of the product. So we should take corresponding measures to avoiding vulcanization, Such as to avoid using sulphur volatile substances and keeping away from high sulphur content of the material.

5、Safety advice for human eyes

- ☆Viewing direct to the light emitting center of the LEDs, especially those of great luminous Intensity will cause great hazard to human eyes .Please be careful.

6、Design consideration

- ☆In designing a circuit about LED, the current through each LED must not exceed the absolute maximum rating specified for each LED. In the meanwhile, resistors for protection should be applied, otherwise slight voltage shift will cause big current change, burn out may happen.