



СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ

Product type:LED		
Product name: 1210 red & yellow led		
Part No.: 1210R3Y3-001		
Sample No.:		
Acknowledgement Numbers: 2018042511		
签核 (Signatures)		
核准(Approved)	审核(Checked)	制定(Drawn)
周冯	左耀州	李灵昌

客户 (Customer)		
公司名称(Corporation):		
物料编码(Material No.):		
物料名称(Part No.):		
客户确认 (Customer Signatures)		

СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ


Feature

- *Low power consumption
- *Long life-solid state reliability
- *Available on tape and reel
- *RoHS compliant


特征

- *低能耗
- *寿命长
- *易于装贴
- *符合 RoHS 要求

Package outline dimensions (产品外型尺寸)

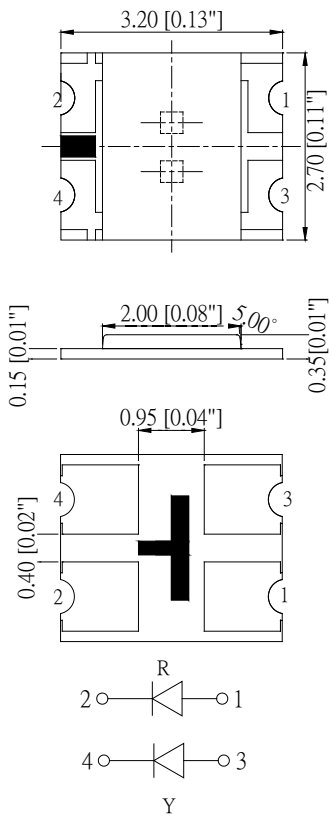

Recommend Pad Layout

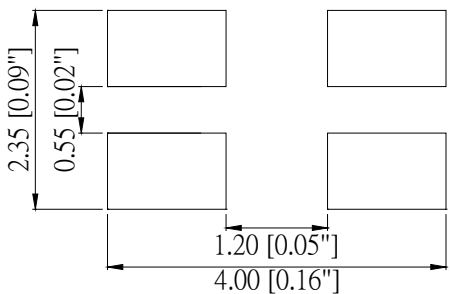

Note:

1. All dimensions are in millimeters (mm);
2. X.X, X.XX is +/-0.1mm
3. The device has a single mounting surface, the device must be mounted according to the specifications.

СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ

Electrical characteristics data sheet

Selection Guide (选用指示)

Part No. (产品型号)	Emitted Color (发光颜色)	Resin color (胶体颜色)	Viewing Angle (发光角度) 20 _{1/2}
1210R3Y3-001	Red &Yellow	clear	140°

Absolute Maximum Ratings at Ta=25℃ (极限参数)

Parameter (项目)	Symbol (符号)	Value (数值)		Unit (单位)
		R	Y	
Power dissipation (功率消耗)	Pd	72	72	mW
DC Forward Current (正向电流)	If	30	30	mA
Peak Forward Current ⁽¹⁾ (峰值电流)	Ifp	125	125	mA
Reverse Voltage (反向电压)	Vr	5	5	V
Operating Temperature (工作环境温度)	Topr	-40to+80		℃
Storage Temperature (储存温度)	Tstg	-40to+85		℃
Lead Solder Temperature (焊接温度)	Tsol	260 for 5sec		℃

Notes:

1. 1/10 duty cycle, 0.1ms pulse width;
2. The products are sensitive to static electricity and must be carefully taken when handling products.


Electrical/Optical Characteristics Ta=25℃ (电子光学特性)

Parameter (参数)	Symbol (符号)	Condition (条件)	Emitting Color (发光颜色)	Value (数值)			Unit
				Min.	Typ.	Max.	
Forward voltage (正向电压)	Vf	If=20mA	R	1.8	---	2.4	V
			Y	1.8	---	2.4	
Luminous intensity (发光强度)	Iv	If=20mA	R	80	125	---	mcd
			Y	100	125	---	
Dominant wavelength (主波长)	λ_d	If=20mA	R	620	---	635	nm
			Y	585	---	595	
peak wavelength (峰值波长)	λ_p	If=20mA	R	---	643	---	nm
			Y	---	591	---	
Spectrum Radiation Bandwidth (半波宽度)	$\Delta\lambda$	If=20mA	R	---	21	---	nm
			Y	---	18	---	
Reverse current (反向电流)	Ir	Vr=5V	R	---	---	10	μ A
			Y				

Notes:

1. Forward voltage: $\pm 0.1V$;
2. wavelength: $\pm 1.5nm$
3. Luminous Intensity: $\pm 10\%$.

Typical Electro-Optical Characteristics Curves

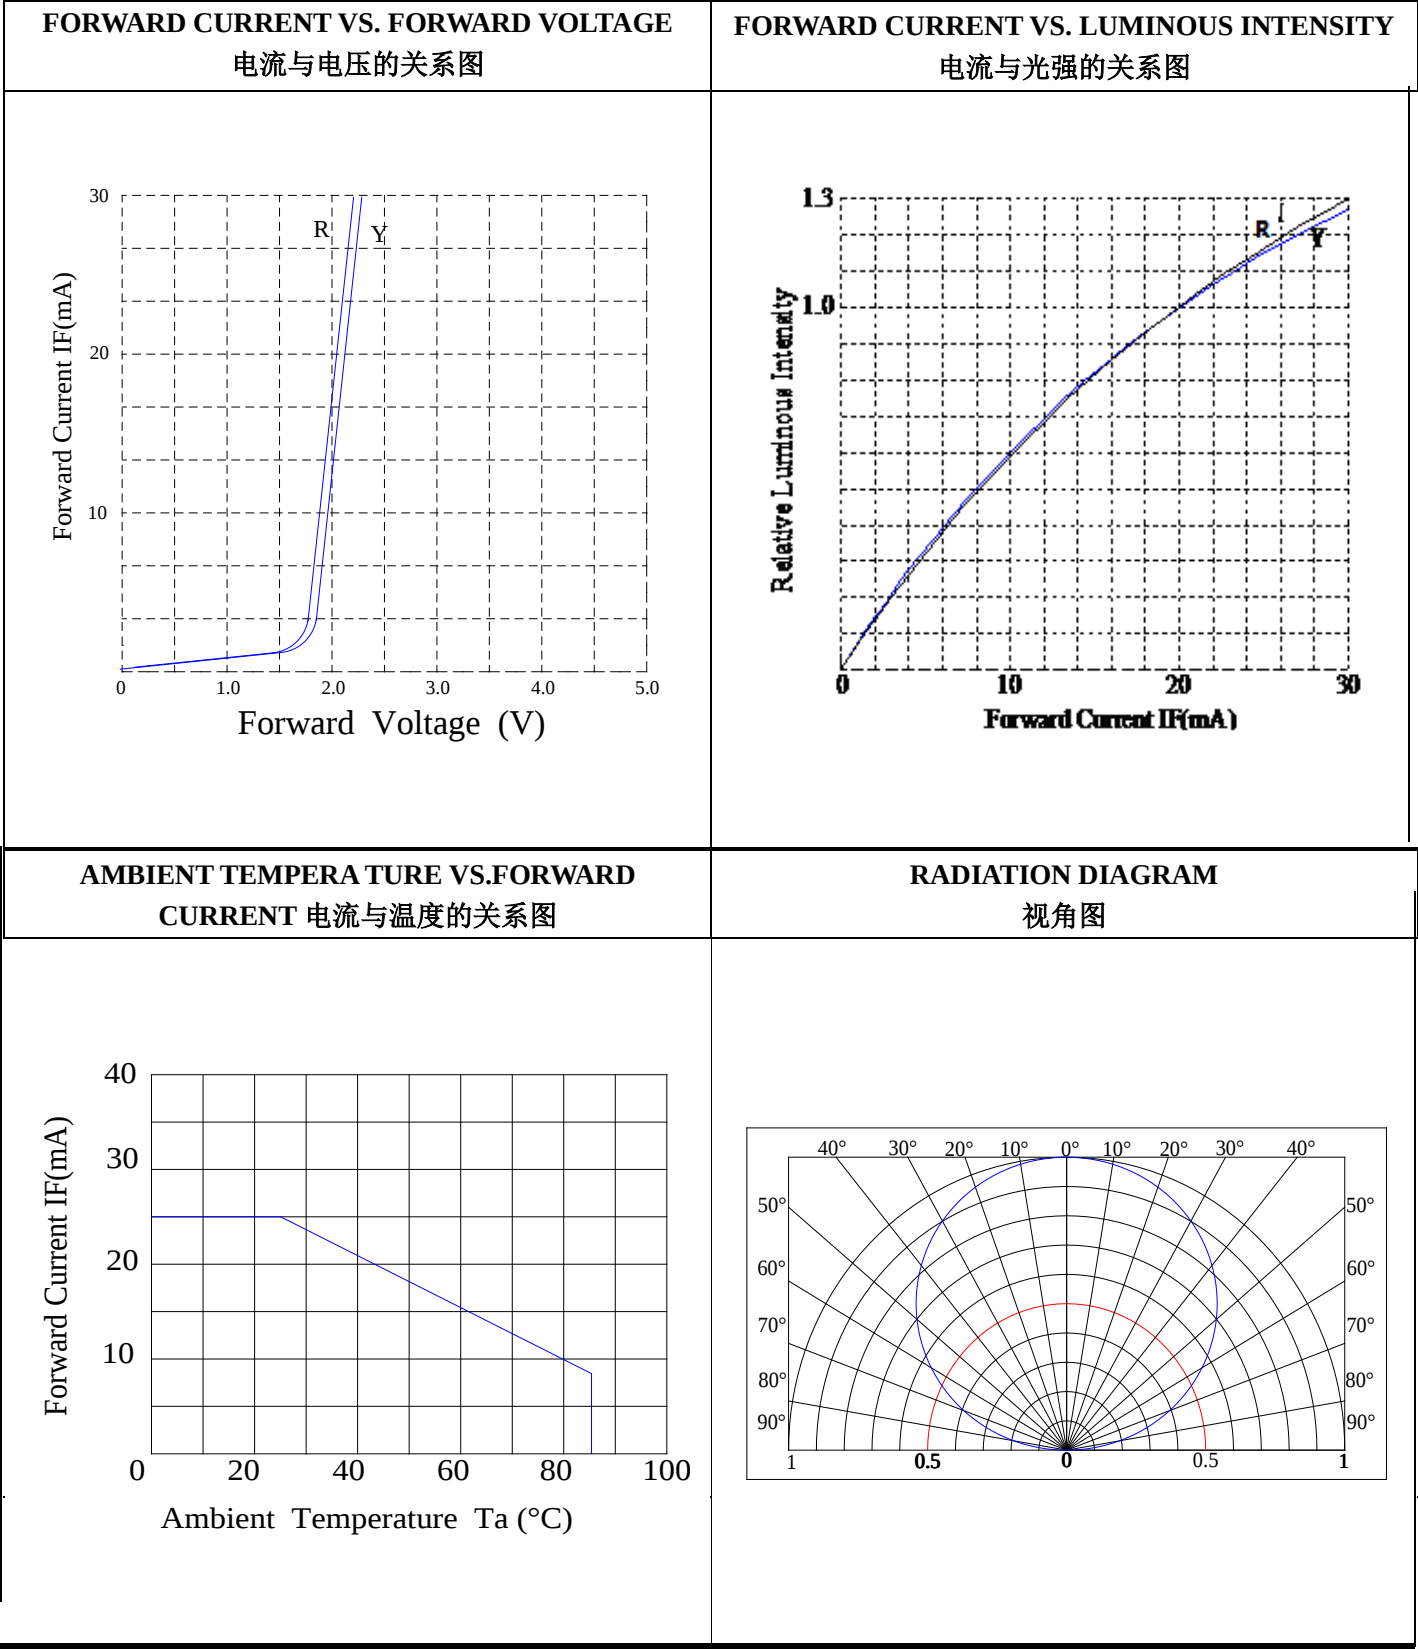

СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ

Reliability Test Items and Conditions(可靠性试验及条件)

1、Test items and result(测试项目及结果)

Test Item 测试项目	Ref. Standard 参考标准	Test Condition 测试条件	Note 记录	Number of Damaged 受损数量
Resistance to Soldering Heat (耐热测试)	JESD22-B106	Tsld=260℃,10sec	2 times	0/100
Temperature Cycle (冷热循环)	JESD22-A104	-40℃ 30min ↓↑ 5min 100℃ 30min	100 cycle	0/100
Thermal Shock (冷热冲击)	JESD22-A106	-40℃ 15min ↑↓ 100℃ 15min	100 cycle	0/100
Power temperature Cycling (高低温点亮循环测试)	JESD22-A105	On 5min -40℃>15min ↑↓↑↓<15min Off 5min 100℃>15min	100 cycle	0/100
High temperature Storage (高温储存)	JESD22-A103	Ta=100℃	1000 hrs	0/100
Low temperature Storage (低温储存)	JESD22-A119	Ta=-40℃	1000 hrs	0/100
Lift Test (寿命测试)	JESD22-A108	Ta=25℃ If=20mA	1000 hrs	0/20
High Humidity Heat Lift Test (高温高湿老化)	JESD22-A101	60℃ RH=90 % If=20mA	1000 hrs	0/20

2、Criteria for judging damage（受损失效判定标准）

Item 项目	Symbol 符号	Test Conditions 测试条件	Criteria for Judgment 判断标准	
			Min 最小	Max 最大
Forward voltage 正向电压	VF	IF=20mA	--	U.S.L*)×1.1
Reverse current 反向电流	IR	VR=5V	--	U.S.L*)×2.0
Luminous intensity 光照强度	IV	IF=20mA	L.S.L**)×0.7	--

Notes:


U.S.L.: Upper Standard Level

L.S.L.: Lower Standard Level

СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ

Packaging Dimensions Specification(包装规格)

1、Carrier tape dimensions(载带包装)

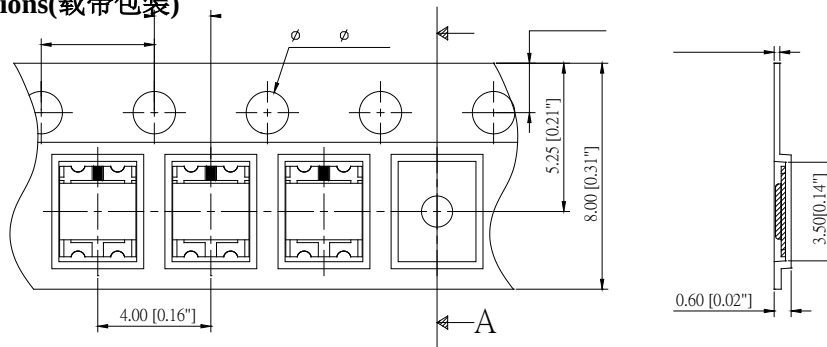

Forward Voltage Rank Combination (IF=20mA)

Rank		Min.	Max.	Unit
Red	☐	1.8	2.4	V
Yellow	☐	1.8	2.4	

Luminous Intensity Rank Combination (IF=20mA)

Rank		Min.	Max.	Unit
Red	B1	80	120	mcd
	B2	120	165	
	B3	165	231	
Yellow	B1	100	140	
	B2	140	200	
	B3	200	280	

Dominant wavelength Rank Combination (IF=20mA)

Rank		Min.	Max.	Unit
Red	R1	620	625	nm
	R2	625	630	
	R3	630	635	
Yellow	Y1	585	590	
	Y2	590	595	

Group Name on Label (Example DATA: ☐Jv ☐Jm 20)


DATA: ☐ Jv ☐ Jm 20	Vf(V)	Iv (mcd)	λ_d (nm)	Test Condition
Red ☐ $\rightarrow$ B1 $\rightarrow$ R1 $\rightarrow$ 20	1.8~2.4	80~120	620~625	IF=20mA
Yellow ☐ $\rightarrow$ B1 $\rightarrow$ Y1 $\rightarrow$ 20	1.8~2.4	100~140	585~590	

СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ


Notes:

- 1) All dimensions are in millimeters
- 2) Tolerance is ± 0.15 unless otherwise noted

2、Details of carrier tape(编带细节)

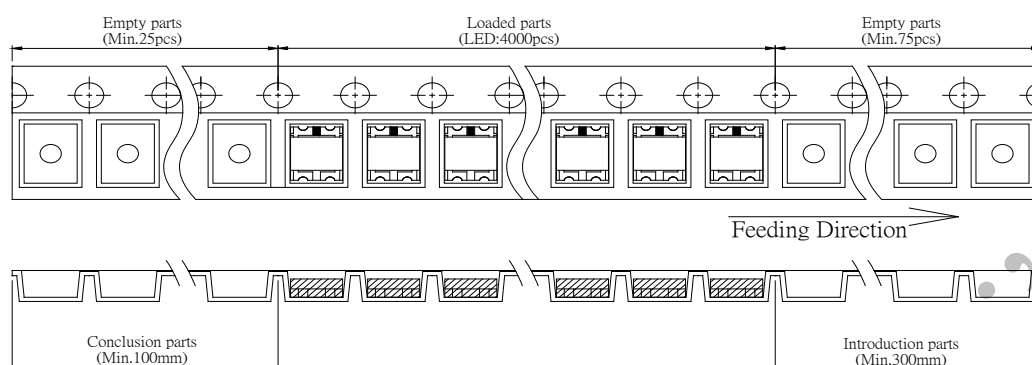


3、Reel dimensions(带盘尺寸)

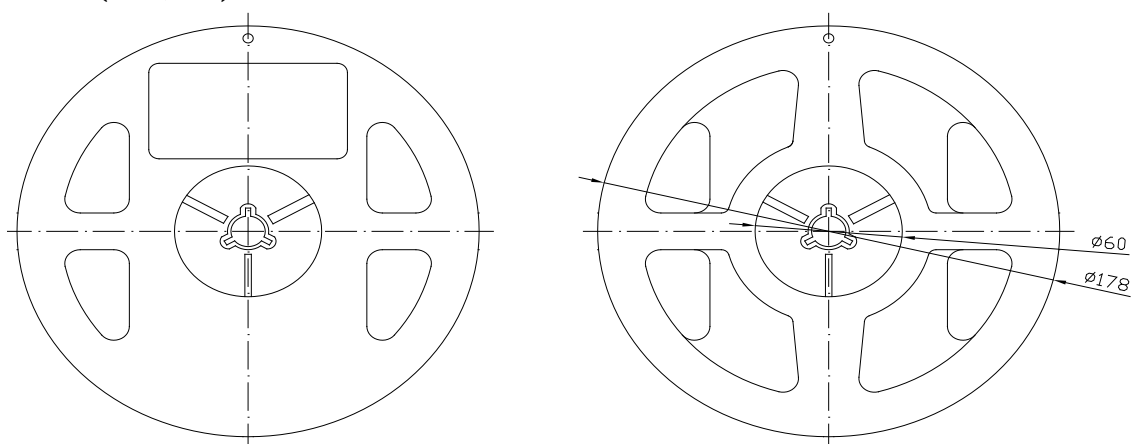

Packaging Dimensions Specification(包装规格)


4、Moisture-Proof and anti-static electricity(防潮抗静电包装)

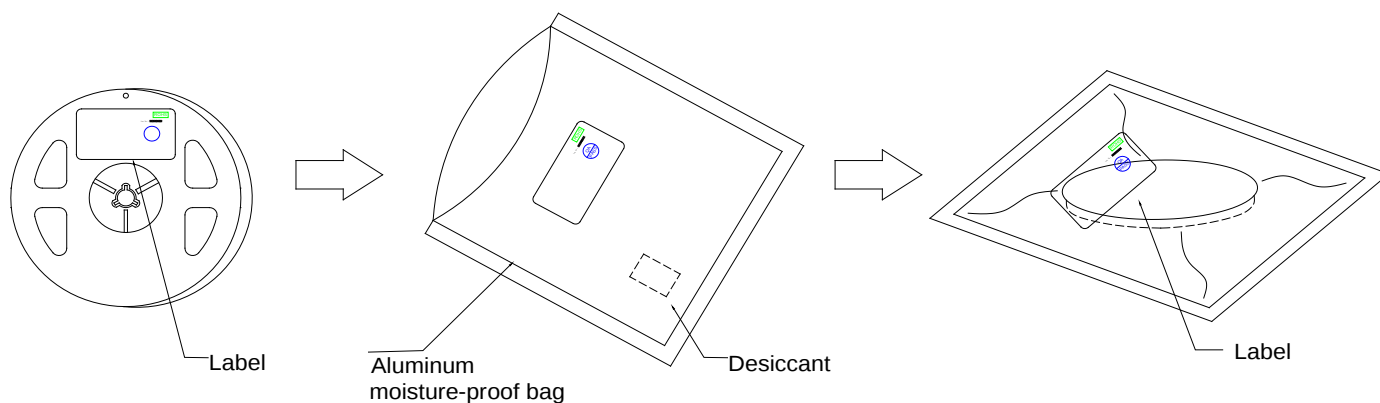

Precautions

1、Requirements for application and reflow soldering 应用及回流焊要求:

Use the recommended curve in the under figure of Pb-free reflow soldering.

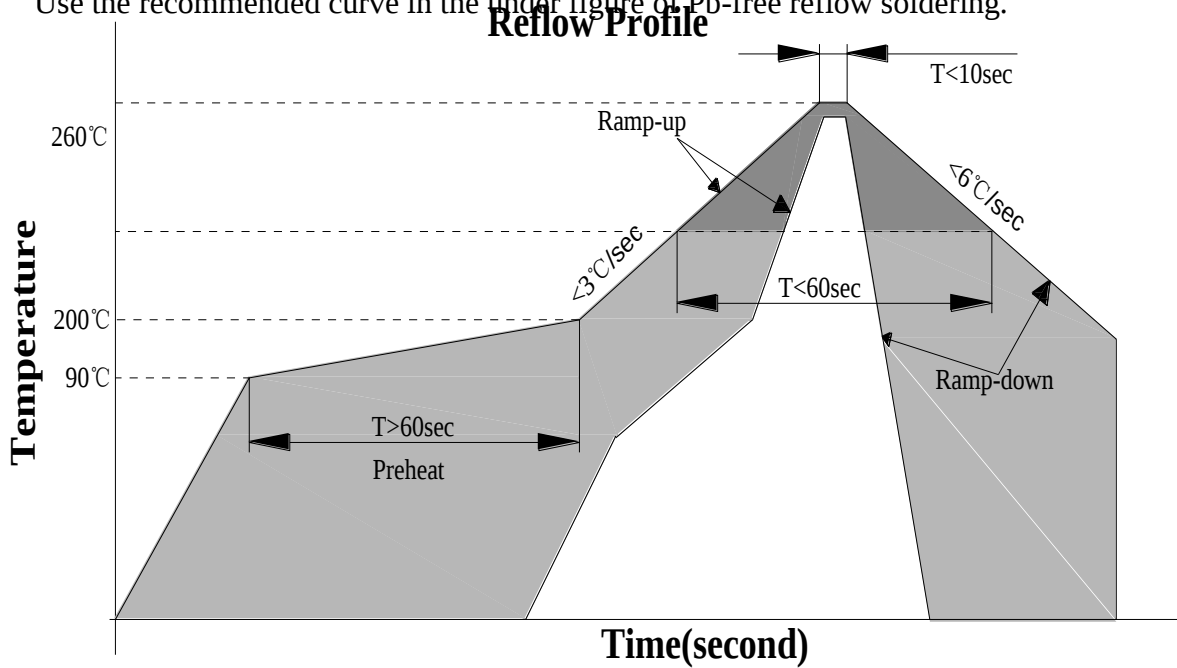

☆Notes for reflow soldering:

- 1) No more than twice for reflow soldering.
- 2) To ensure the quality of our LEDs, please do not put pressure on the lens of LEDs.
- 3) Please choose the right nozzle to avoid the damage to products due to the pressure.
- 4) Please put on the antistatic hand loop during the use. The worktable should be with antistatic finish. The equipments must be contacted with ground

☆Handwork soldering:

- 1) During the soldering, the electronic soldering iron must be kept under the temperature of 350°C and the soldering time must not be beyond 3 seconds. No touch between the electronic soldering iron and colloid.
- 2) Handwork soldering is only allowed once. We won't take responsibility for more than that.



СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ

e

2、Storage(储存)

- ☆Moisture proof and anti-electrostatic package with moisture absorbent material is used to keep moisture to a minimum. Before opening the package, the product should be kept at 30℃ or less and humidity less than 60%RH ,and be used in six months.
- ☆After opening the package, the product should be stored at 30℃ or less and humidity less than 10%RH, and be soldered within 24 hours. It is recommended that the product be operated at the workshop condition of 30℃ or less and humidity less than 60%RH.
- ☆If the moisture absorbent material has fade away or the LEDs have exceeded the storage time, baking treatment should be performed based on the following condition (75±5) °C for 24 hour.

3、Static electricity

- ☆Static electricity or surge voltage damages the LEDs .Damaged LEDs will show some unusual characteristic such as the forward voltage comes lower, or the LEDs do not light at the low current .even not light. All devices, equipment and machinery must be properly grounded. At the same time ,it is recommended that wrist bands or anti-electrostatic gloves, anti-electrostatic containers be used when dealing with the LEDs .

4、

- ☆LED curing is due to sulfur being in bracket and the +1 price of silver in the chemical reaction generated Ag₂S in the process. It will lead to the capacity of reflecting of silver layer reducing, light color temp

erature drift and serious decline,

5、Safety advice for human eyes

- ☆Seriously affecting the performance of the product. So we should take corresponding measures to avoiding vulcanization,
- ☆Viewing direct to the light emitting center of the LEDs, especially those of great luminous Intensity will cause great hazard to human eyes .Please be careful.

6、Design consideration

- ☆In designing a circuit about LED, the current through each LED must not exceed the absolute maximum rating specified for each LED. In the meanwhile, resistors for protection should be applied, otherwise slight voltage shift will cause big current change, burn out may happen.