


BEELED -

MODEL: 3004G6D-EPB-P

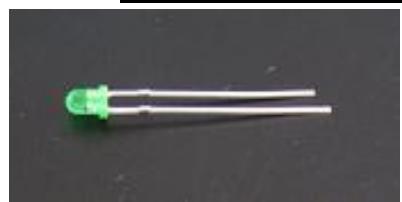

Features

- Choice of various viewing angles
- Low Power consumption
- General purpose leads
- Available on tape and reel.
- Reliable and robust
- The product itself will remain within RoHS compliant version.
- Pb free

Descriptions

- The LED lamps are available with different colors, intensities, epoxy colors, etc

Usage Notes:

- When using LED, it must use a protective resistor in series with DC current about 18mA

Applications

- TV set
- Monitor
- Telephone
- Computer


Device Selection Guide

| LED Part No. | Chip | | Lens Color |
|---------------|----------|---------------|----------------|
| | Material | Emitted Color | |
| 3004G6D-EPB-P | GaP | Green | Color Diffused |

BEELED -

MODEL: 3004G6D-EPB-P

Package Dimensions

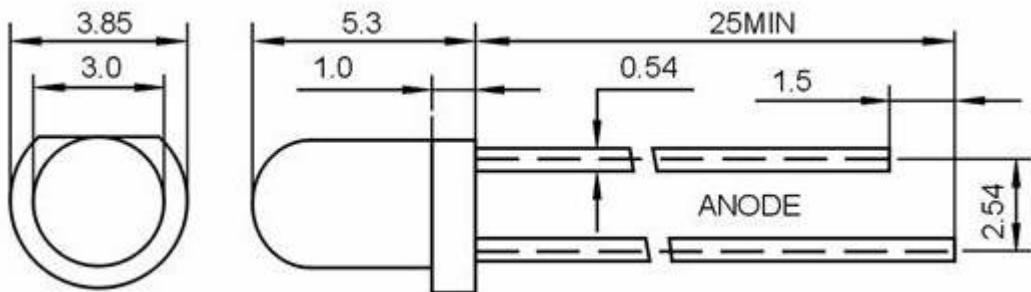

UNIT: mm

Notes:

- Other dimensions are in millimeters, tolerance is 0.25mm except being specified.
- Protruded resin under flange is 1.5mm Max LED.
- Bare copper alloy is exposed at tie-bar portion after cutting.



BEELED -

MODEL: 3004G6D-EPB-P

Absolute Maximum Rating ($T_a=25^\circ C$)

| Parameter | Symbol | Absolute Maximum Rating | Unit |
|-----------------------|-----------|-------------------------|------|
| Forward Pulse Current | I_{FPM} | 100 | mA |
| Forward Current | I_{FM} | 30 | mA |
| Reverse Voltage | V_R | 5 | V |
| Power Dissipation | P_D | 90 | mW |
| Operating Temperature | T_{opr} | -40~+80 | °C |
| Storage Temperature | T_{stg} | -40~+100 | °C |
| Soldering Heat (5s) | T_{sol} | 260 | °C |

Note: *1:Soldering time \leq 5 seconds.

Electro-Optical Characteristics ($T_a=25^\circ C$)

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Condition |
|--------------------------|-----------------|------|------|------|------|----------------|
| Luminous Intensity | I_v | 25 | 40 | 50 | med | IF=20mA(Note1) |
| Viewing Angle | $2\theta_{1/2}$ | --- | 40 | --- | Deg | (Note 2) |
| Peak Emission Wavelength | λ_p | 565 | 570 | 575 | nm | IF=20mA |
| Spectral Line Half-Width | $\Delta\lambda$ | 15 | 20 | 25 | nm | IF=20mA |
| Forward Voltage | V_F | 1.9 | --- | 2.3 | V | IF=20mA |
| Reverse Current | I_R | --- | --- | 10 | μA | VR=5V |

Note:

1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.

MODEL: 3004G6D-EPB-P

Typical Electro-Optical Characteristics Curves

