



СВЕТОДИОДЫ BEELED - ТЕХНИЧЕСКОЕ ОПИСАНИЕ

MODEL: 5034G3C-CSC-A

Features

- High efficiency
- Low Power consumption
- General purpose leads
- Selected minimum intensities
- Available on tape and reel
- Pb free



Descriptions

- The series is specially designed for applications requiring higher brightness
- The LED lamps are available with different colors, intensities, epoxy colors, etc
- Superior performance in outdoor environment



Usage Notes:

- Surge will damage the LED
- When using LED, it must use a protective resistor in series with DC current about 20mA

Applications

- Status indicators
- Commercial use
- Advertising Signs
- Back lighting

СВЕТОДИОДЫ BEELED - ТЕХНИЧЕСКОЕ ОПИСАНИЕ

MODEL: 5034G3C-CSC-A

Device Selection Guide


LED Part No.	Chip		Lens Color	Iv(mcd)@20mA		Viewing Angle
	Material	Emitted Color		Min.	Max.	2θ1/2
5034G3C-CSC-A	InGaN	Green	Water clear	3000	5000	25-30

Note:

1. $\theta 1/2$ is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

Package Dimensions

UNIT:mm

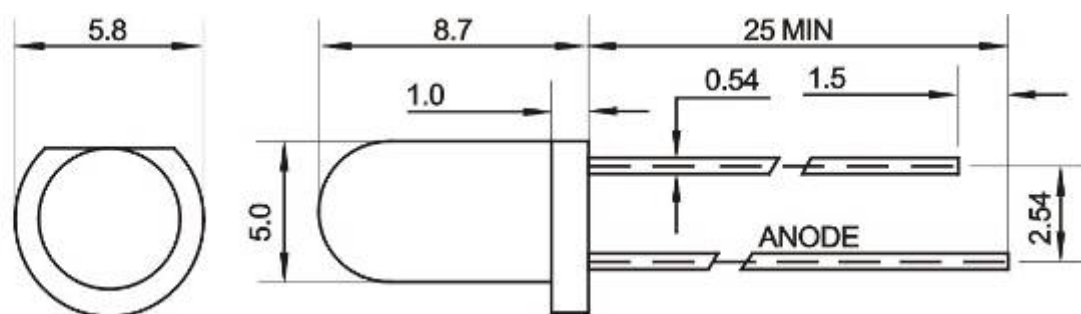

Notes:

- *All dimensions are in millimeters.
- *Tolerance is ± 0.25 unless otherwise noted.
- *Specifications are subject to change without notice.



СВЕТОДИОДЫ BEELED - ТЕХНИЧЕСКОЕ ОПИСАНИЕ

MODEL: **5034G3C-CSC-A**

Absolute Maximum Rating ($T_a=25^{\circ}\text{C}$)

Parameter	Symbol	Absolute Maximum Rating	Unit
Forward Pulse Current	I_{FPM}	70	mA
Forward Current	I_{FM}	30	mA
Reverse Voltage	V_{R}	5	V
Power Dissipation	P_{D}	100	mW
Operating Temperature	T_{opr}	$-40 \sim +80$	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	$-40 \sim +100$	$^{\circ}\text{C}$
Lead Solder Temperature	T_{sol}	260 $^{\circ}\text{C}$ for 3 seconds	$^{\circ}\text{C}$

Electro-Optical Characteristics ($T_a=25^{\circ}\text{C}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Peak Emission Wavelength	λ_{p}	520	---	530	nm	$I_{\text{F}}=20\text{mA}$
Forward Voltage	V_{F}	2.9	---	3.5	V	$I_{\text{F}}=20\text{mA}$
Reverse Current	I_{R}	---	---	10	μA	$V_{\text{R}}=5\text{V}$







Note:

- Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
- $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.

СВЕТОДИОДЫ BEELED - ТЕХНИЧЕСКОЕ ОПИСАНИЕ

MODEL: **5034G3C-CSC-A**

Typical Electro-Optical Characteristics Curves

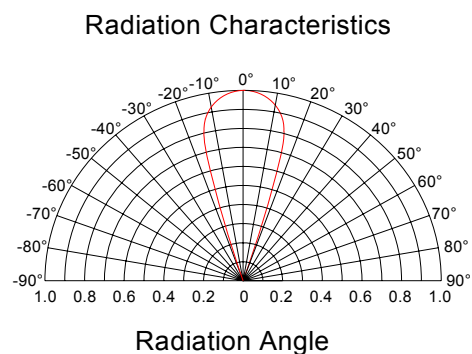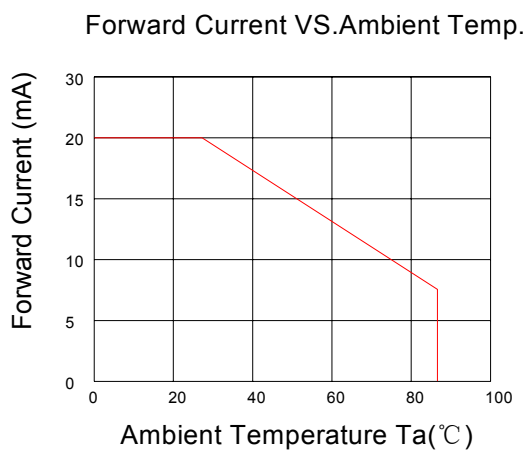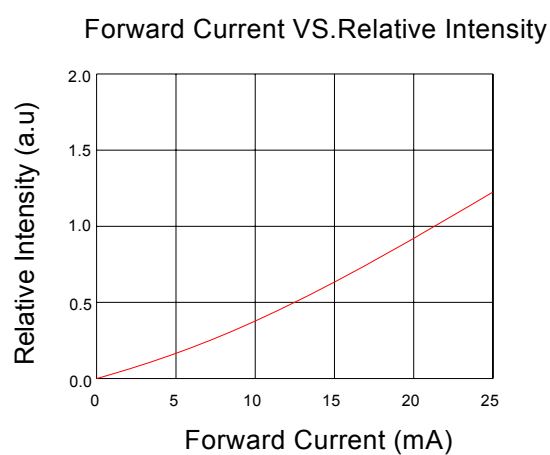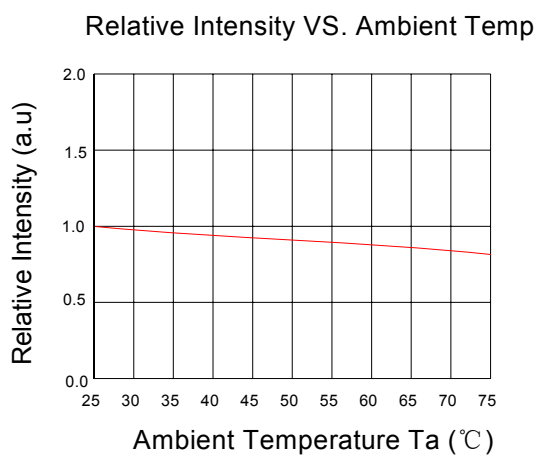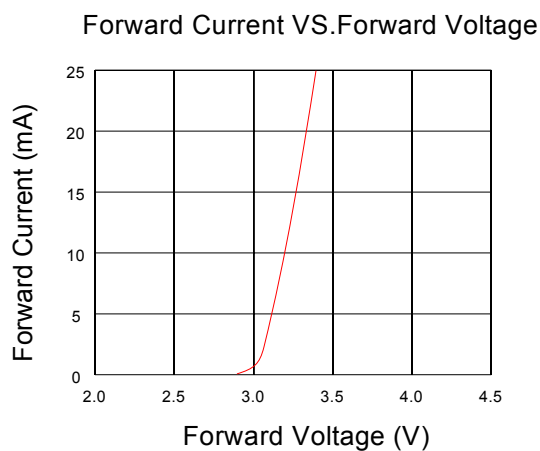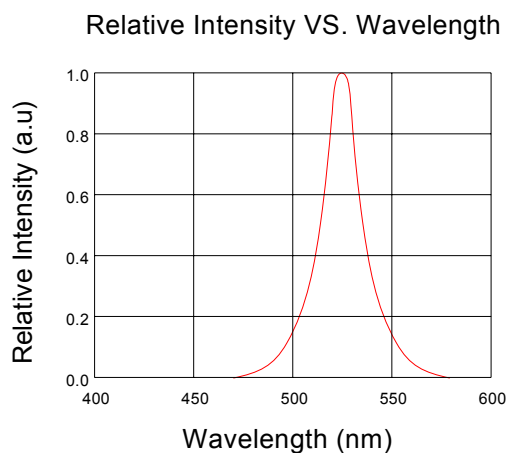



СВЕТОДИОДЫ BEELED - ТЕХНИЧЕСКОЕ ОПИСАНИЕ

MODEL: 5034G3C-CSC-A

Примечание

1. Приведенные спецификации могут быть изменены без уведомления. BEELED сохраняет за собой право изменить материалы в приведенной выше спецификации.
2. При использовании светодиодов, максимально придерживайтесь данному описанию и инструкциям. BEELED не несет ответственности за любые повреждения, полученные в результате не соблюдения вышеперечисленных технических требований, инструкций и спцификаций.
3. Это техническое описание содержит материалы, защищенные авторским правом BEELED. Полная или частичная публикация без согласия BEELED запрещена.