

LED Test Report

Product Mark

Product Type :730

Temperature :KEM'C

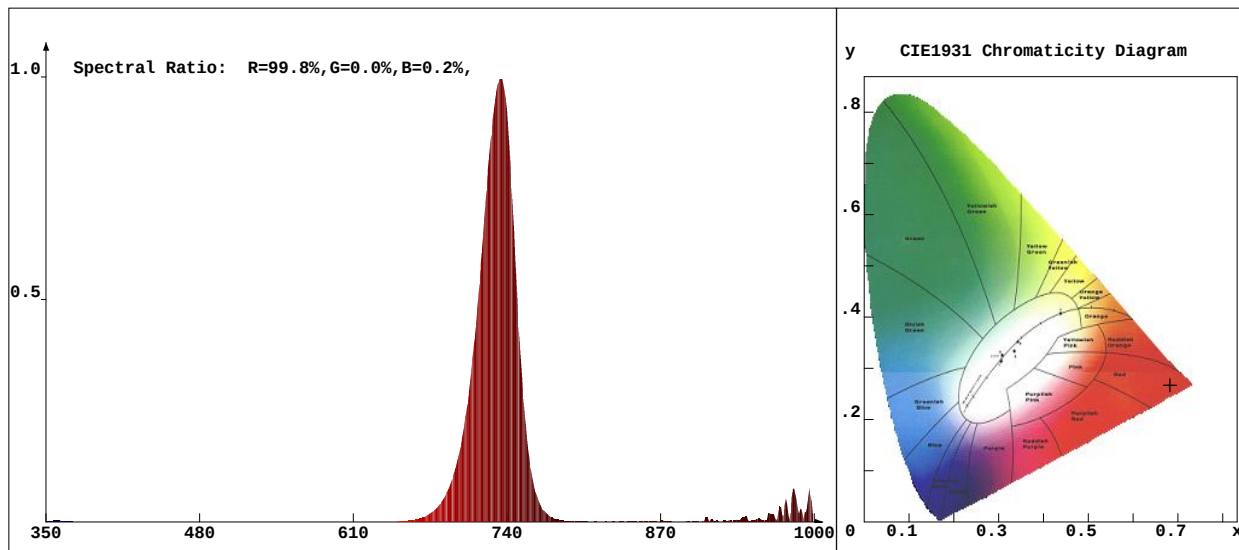
Operator :KEM

Remark:

Manufacturer :BEELED

Humidity :50%

Test Date :2023-10-09 15:57:50

**Chroma Parameters**

Chro.Coord.:x=0.6824 y=0.2670 u=0.5640 v=0.3311 duv=-0.0137

CCT: 1515K Dominant Wave.:699.0nm Purity:87.3%

Flux RGB Ratio:R=51.7%,G=45.9%,B=2.3% Peak Wave:734.7nm Half Width:33.4nm

Rendering Index:Ra=-87.8

R1 =-99 R2 =-32 R3 =-195 R4 =-64 R5 =-70 R6 =47 R7 =-98 R8 =-191

R9 =-246 R10=-193 R11=-34 R12=-200 R13=-107 R14=-183 R15=-154

Photo Parameters

Flux:0.520lm

Effi.:74.2lm/W

Radiant:32.4mW

Iv:0.0mcd

Efficiency:0.011

Effi Level:A++ (EU 874-2012)

Ele. Parameters

Voltage:U=0.020V

Current:I=0.3500A

Power:P=0.01W

Power Factor:PF=1.000

Instrument state

Instrument:Hopoo HP8000

Integral Time: 313.169ms

VPeak: 15350

VDark: 1026

Scan Range: 350-1000nm

Product ID: 201712443