

MODEL: 1206AML-001

Sample Approval Sheet

Product type: Chip LED					
Product name: 1206 Orange	Product name: 1206 Orange LED				
Part No.: 1206AML-001					
Sample No.:					
Acknowledgement Numbers: 201808240002					
Signatures					
Approved	Checked	Drawn			
周宏					

Customer					
Corporation:					
Material No.:	Material No.:				
Part No.:					
	Customer Signatures				




MODEL: 1206AML-001


Feature


- *Low power consumption
- *Long life-solid state reliability
- *Available on tape and reel
- *RoHS compliant


Package outline dimensions

3.20 [0.13"]



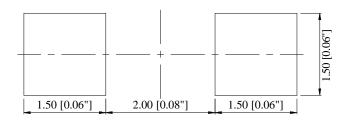







Note:

- 1. All dimensions are in millimeters (mm);
- 2. X.X is \pm 0.1mm, X.XX is \pm 0.05mm unless otherwise noted;
- 3. The device has a single mounting surface, the device must be mounted according to the specifications.



MODEL: 1206AML-001

 \mathbf{V}

5

Electrical characteristics data sheet

Selection Guide

Reverse Voltage

Part No.	Emitted Color Resin color		an color	Viewing Angle 2θ _{1/2}		
1206AML-001	Orange		Water transparent			130°
Absolute Maximum Ratings at Ta=25°C						
Parameter	Parameter		Symbol Valu		e	Unit
Power dissipation		P	d	70		mW
DC Forward Current		I	f	30		mA
Peak Forward Current ⁽¹⁾		If	p	70		mA

Vr

Electro-Static-Discharge⁽²⁾ (HBM) **ESD** 1000 \mathbf{V} $^{\circ}$ **Operating Temperature Topr** -25to+85 **Storage Temperature Tstg** -40to+100 $^{\circ}$ $^{\circ}$ Tsol **Lead Solder Temperature** 250 for 5sec

Notes:

1. 1/10 duty cycle,0.1ms pulse width

2. The products are sensitive to static electricity and must be carefully taken when handling products.

Electrical/Optical Characteristics Ta=25℃ (电子光学特性)

Doministra	Symbol Condition		Value			Unit	
Parameter			Min.	Тур.	Max.	Onit	
Forward voltage	VF	If=20mA	1.8		2.4	V	
Luminous intensity	IV	If=20mA	100	125		mcd	
Dominant wavelength	WLD	If=20mA	600		610	nm	
Peak wavelength	WLP	If=20mA		609		nm	
Reverse current	Ir	Vr=5V			10	μА	

Notes:

1. Forward voltage: $\pm 0.1V$

2. Dominant Wavelength: ±1nm

3. Luminous intensity: $\pm 10\%$





MODEL: 1206AML-001

Typical Electro-Optical Characteristics Curves

FORWARD CURRENT VS. FORWARD VOLTAGE


FORWARD CURRENT VS. LUMINOUS INTENSITY

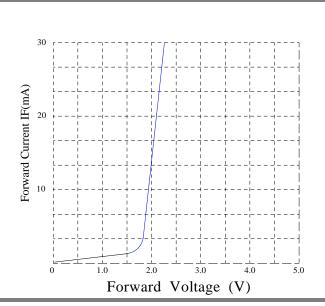


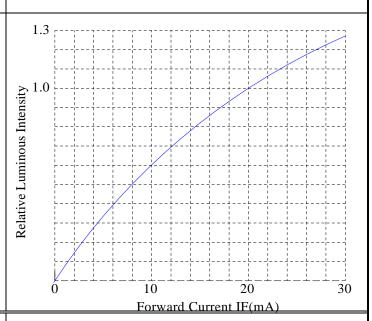

AMBIENT TEMPERA TURE VS.FORWARD CURRENT

RADIATION DIAGRAM

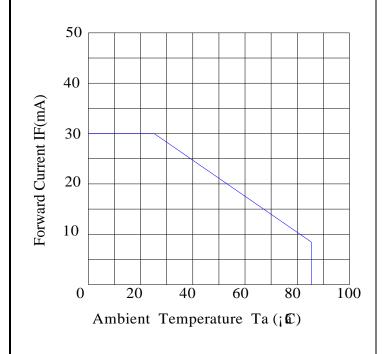

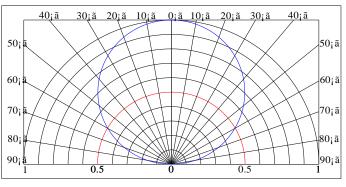



MODEL: 1206AML-001

Bin Range of Technical Data Sheet

Voltage code(电压等级)(IF=20mA, Ta=25℃)			Luminous code(光强等级)(IF=20mA, Ta=25℃)		
n' G. L	Forward voltage (V)		Din Codo	Luminous Inte	ensity (mcd)
Bin Code	min	max	Bin Code min		max
11	1.8	2	L	100	125
12	2	2.2	M	125	160
13	2.2	2.4	N	160	200
			0	200	250

Color Bin Limits

Color code(颜色等级)(IF=20mA, Ta=25℃)				
Din Cada	Dominant wavelength (nm)			
Bin Code	min	max		
01	600	602		
O2	602	604		
03	604	606		
04	606	608		
05	608	610		

Notes:

- 1. Tolerance of forward voltage for each Bin limit is $\pm 0.1v$.
- 2. Tolerance of luminous intensity for each Bin limit is $\pm 10\%$.
- 3. Tolerance of wavelength for each Bin limit is ± 1 nm.



MODEL: 1206AML-001

Reliability Test Items and Conditions

1. Test items and result

Test Item	Ref. Standard	Test Condition	Note	Number of Damaged
Resistance to Soldering Heat	JESD22-B106	Tsld=260°C,10sec	2 times	0/100
Temperature Cycle	JESD22-A104	-40°C 30min ↓↑ 5min 10 cycle 100°C 30min		0/100
Thermal Shock	JESD22-A106	-40°C 15min ↑↓ 10 cy 100°C 15min		0/100
Power temperature Cycling	JESD22-A105	On 5min -40°C>15min ↑ ↓ ↑ ↓<15min Off 5min 100°C>15min	10 cycle	0/100
High temperature Storage	JESD22-A103	Ta=100°C	1000 hrs	0/100
Low temperature Storage	JESD22-A119	Ta=-40°C	1000 hrs	0/100
Lift Test	JESD22-A108	T _a =25℃ I _F =20mA	1000 hrs	0/20
High Humidity Heat Lift Test	JESD22-A101	60℃ RH=90% IF=20mA	1000 hrs	0/20

2. Criteria for judging damage

Item 项目	Symbol 符号	Test Conditions 测试条件	Criteria for Judgment 判断标准	
У. П	10.0	17.7.74 (27.11	Min 最小	Max 最大
Forward voltage 正向电压	VF	IF=20mA	1	U.S.L*)×1.1
Reverse current 反向电流	IR	VR=5V		U.S.L*)×2.0
Luminous intensity 光照强度	IV	IF=20mA	L.S.L**)×0.7	

Notes:

U.S.L.: Upper Standard Level


L.S.L.: Lower Standard Level




MODEL: 1206AML-001

Packaging Dimensions Specification

1. Carrier tape dimensions

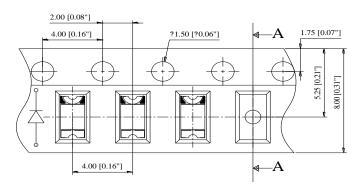





Notes:

- 1) All dimensions are in millimeters
- 2) Tolerance is ± 0.15 unless otherwise noted
- 3) 3,000 pcs/Reel.

2、Details of carrier tape(编带细节)

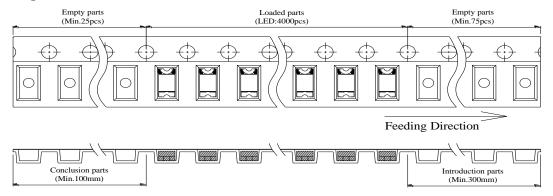

3, Reel dimension

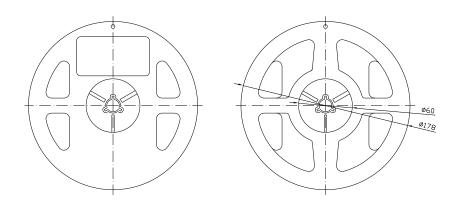




MODEL: 1206AML-001

Packaging Dimensions Specification

4. Moisture-Proof and anti-static electricity

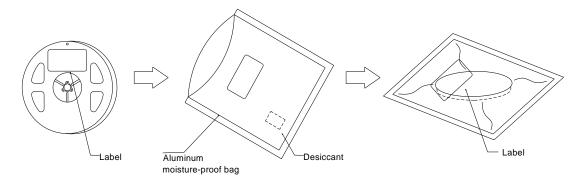

5、Label(标签)

BEELED

RoHS

Part No.:1206AML-001

VF (v) : *********

IV (mcd) : ********

WLD (nm) : *******

Q'TY(pcs):*****

Lot No. :****** Made In China

Label Explanation:

VF : Forward voltage (正向电压)

IV : Luminous intensity (发光强度)
WLD : Dominant wavelength (主波长)

VF\IV\WLD used to represent the corresponding Bin code


Precautions

1. Requirements for application and reflow soldering

Use the recommended curve in the under figure of Pb-free reflow soldering.



MODEL: <u>1206AML-001</u>

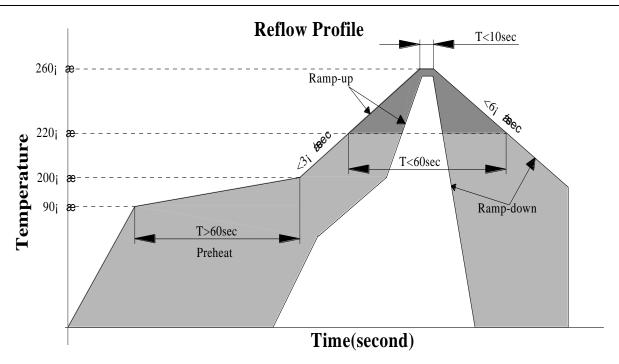

☆Notes for reflow soldering:

- 1) No more than twice for reflow soldering.
- 2) To ensure the quality of our LEDs, please do not put pressure on the lens of LEDs.
- 3) Please choose the right nozzle to avoid the damage to products due to the pressure.
- 4) Please put on the antistatic hand loop during the use. The worktable should be with antistatic finish. The equipments must be contacted with ground

☆ Handwork soldering:

- 1) During the soldering, the electronic soldering iron must be kept under the temperature of 350°C and the soldering time must not be beyond 3 seconds. No touch between the electronic soldering iron and colloid.
- 2) Handwork soldering is only allowed once. We won't take responsibility for more than that.
- 3) Avoid using sharp objects to compress products Colloidal Part directly.
- 4) Please put on the antistatic hand loop during the use. The worktable should be with antistatic finish. The equipments must be contacted with ground.

2. Storage

- ☆Moisture proof and anti-electrostatic package with moisture absorbent material is used to keep moisture to a minimum.

 Before opening the package, the product should be kept at 30°C or less and humidity less than 60%RH, and be used in six months.
- ☆ After opening the package, the product should be stored at 30 °C or less and humidity less than 10% RH, and be soldered within 24 hours. It is recommended that the product be operated at the workshop condition of 30 °C or less and humidity less than 60% RH.
- ☆If the moisture absorbent material has fade away or the LEDs have exceeded the storage time, baking treatment should be performed based on the following condition(75±5) °C for 24 hour ∘



MODEL: <u>1206AML-001</u>

3. Static electricity

☆Static electricity or surge voltage damages the LEDs .Damaged LEDs will show some unusual characteristic such as the forward voltage comes lower, or the LEDs do not light at the low current .even not light.

All devices, equipment and machinery must be properly grounded. At the same time, it is recommended that wrist bands or anti-electrostatic gloves, anti-electrostatic containers be used when dealing with the LEDs.

4. Vulcanization

☆LED curing is due to sulfur being in bracket and the +1 price of silver in the chemical reaction generated Ag2S in the process. It will lead to the capacity of reflecting of silver layer reducing, light color temperature drift and serious decline, affecting the performance of the product. So we should take corresponding measures to avoiding vulcanization, avoid using sulphur volatile substances and keeping away from high sulphur content of the material.

5. Safety advice for human eyes

☆ Viewing direct to the light emitting center of the LEDs, especially those of great luminous Intensity will cause great hazard to human eyes .Please be careful.

6. Design consideration

☆In designing a circuit about LED, the current through each LED must not exceed the absolute maximum rating specified for
each LED. In the meanwhile, resistors for protection should be applied, otherwise slight voltage shift will cause big current
change, burn out may happen.