



СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ

MODEL: 3034Y1D-EHE-C

Features

- High efficiency
- Low Power consumption
- General purpose leads
- Selected minimum intensities
- Available on tape and reel
- Pb free



Descriptions

- The series is specially designed for applications requiring higher brightness
- The LED lamps are available with different colors, intensities, epoxy colors, etc
- Superior performance in outdoor environment

Usage Notes:

- Surge will damage the LED
- When using LED, it must use a protective resistor in series with DC current about 20mA

Applications

- Status indicators
- Commercial use
- Advertising Signs
- Back lighting


Device Selection Guide

СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ

MODEL: 3034Y1D-EHE-C

LED Part No.	Chip		Lens Color
	Material	Emitted Color	
3034Y1D-EHE-C	AlGaInP	Yellow	Color Diffused

Package Dimensions

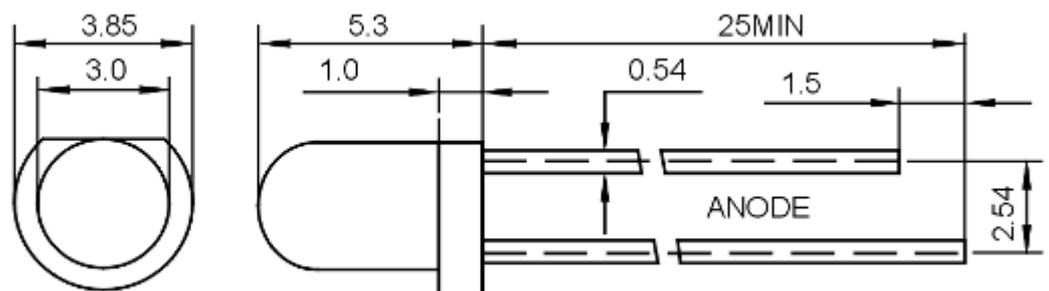

UNIT:mm

Notes:

- Other dimensions are in millimeters, tolerance is 0.25mm except being specified.
- Protruded resin under flange is 1.5mm Max LED.
- Bare copper alloy is exposed at tie-bar portion after cutting.

Absolute Maximum Rating ($T_a=25^{\circ}\text{C}$)

Parameter	Symbol	Absolute Maximum Rating	Unit
Forward Pulse Current	I_{FPM}	100	mA



СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ

MODEL: 3034Y1D-EHE-C

Forward Current	I_{FM}	30	mA
Reverse Voltage	V_R	5	V
Power Dissipation	P_D	140	mW
Operating Temperature	T_{opr}	-40~+80	°C
Storage Temperature	T_{stg}	-40~+100	°C
Soldering Heat (5s)	T_{sol}	260	°C

Electro-Optical Characteristics ($T_a=25^{\circ}C$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I_v	400	550	700	mcd	IF=20mA(Note1)
Viewing Angle	$2\theta_{1/2}$	30	---	40	Deg	(Note 2)
Peak Emission Wavelength	λ_p	580	590	595	nm	IF=20mA
Spectral Line Half-Width	$\Delta\lambda$	15	20	25	nm	IF=20mA
Forward Voltage	V_F	1.9	---	2.5	V	IF=20mA
Reverse Current	I_R	---	---	10	μA	VR=5V

Note:







1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.



СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ

MODEL: 3034Y1D-EHE-C

Typical Electro-Optical Characteristics Curves

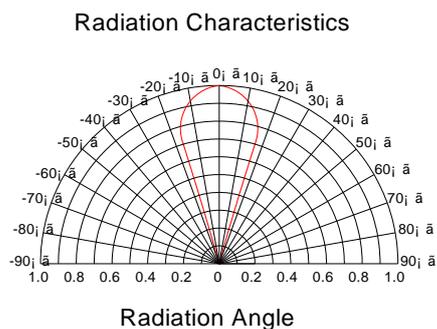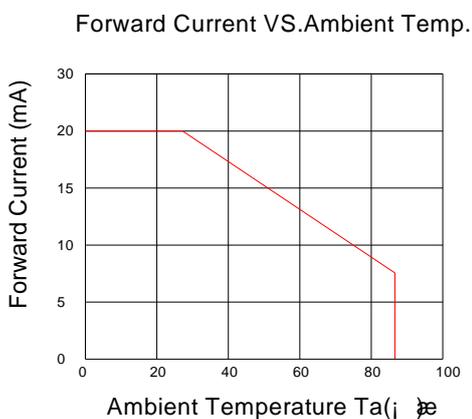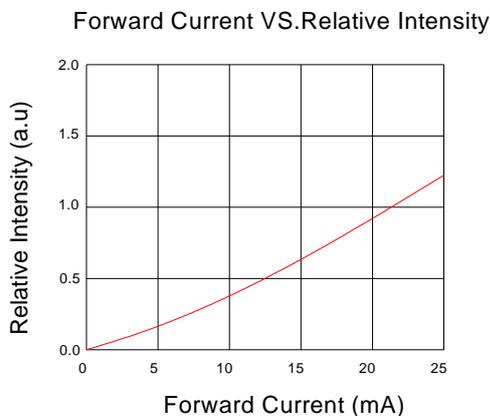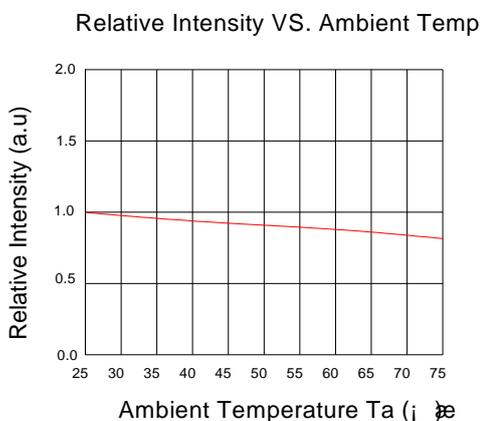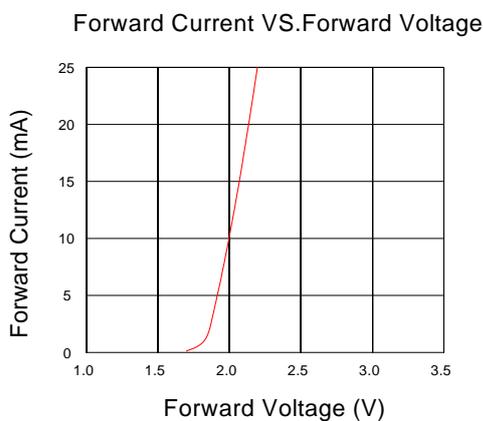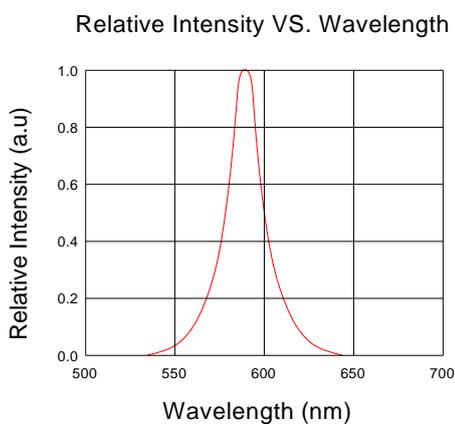



СВЕТОДИОДЫ BEELED – ТЕХНИЧЕСКОЕ ОПИСАНИЕ

MODEL: 3034Y1D-EHE-C

Notes

1. Above specification may be changed without notice. BEELED will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. BEELED assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of BEELED corporation. Please don't reproduce or cause anyone to reproduce them without BEELED's consent.